

## Quote/Order Form

Date: / /	Order No.:	Job Name:
Company Name:		ABN:
Order Contact Name:		Order Contact Phone:
Order Contact Email:		Date order required:
Invoice Address:	State:	Post Code:
Delivery Address:	State:	Post Code:
Site Contact:		Site Contact Phone:

<b>1. Corrolink-S (1000mm) Quote / Order</b>	Quote:	<input type="checkbox"/>	Order:	<input type="checkbox"/>		
<b>2. Thickness</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Core Thickness:	50mm	75mm	100mm	125mm	150mm	180mm
Overall Thickness:	67mm	92mm	117mm	142mm	167mm	197mm

### 3. Roof Colour

Off White <small>(*Surfmist)</small>	Smooth Cream <small>(*Classic Cream)</small>	Merino <small>(*Paperbark)</small>	Gull Grey <small>(*Shale Grey)</small>	Birch Grey <small>(*Dune)</small>	Armour Grey <small>(*Windspray)</small>	Slate Grey <small>(*Woodland Grey)</small>	Jasmin Brown <small>(*Jasper)</small>	Heritage Red <small>(*Manor Red)</small>	Mist Green <small>(*Pale Eucalypt)</small>	Unizinc <small>(*Zincalume)</small>

				<b>+Limited Warranty</b>					<b>Corrosion Resistant Option</b>	
Dusk <small>(*Evening Haze)</small>	Gulf <small>(*Gully)</small>	Wallaroo <small>(*Wallaby)</small>	Basal <small>(*Basalt)</small>							
				Mountain Blue+ <small>(Deep Ocean)</small>	Caulfield Green+ <small>(Cottage Green)</small>	Iron Grey+ <small>(Ironstone)</small>	Monolith+ <small>(Monument)</small>	Ebony+ <small>(Night Sky)</small>	^MagnaFlow™ Off White <small>(*Surfmist)</small>	^MagnaFlow™ Armour Grey <small>(*Windspray)</small>

\*Equivalent colour names are trade marks or registered trade marks of BlueScope Steel Limited and used only for comparison. Colour and finish swatches are provided as an indication only and may not be an actual representation of colour or finish. We recommend checking your chosen colour and finish against an actual sample of the product before purchasing.

MagnaFlow™ only available with MagnaFlow™ ceiling skin.

### 4. Ceiling

<b>Pearl White</b>				<b>Cream</b>			<b>Merino</b>			<b>^MagnaFlow™ Off White</b>			<b>^Timber Effect (Luxline only)</b>
Smooth	Embossed	Micraline	Luxline	Smooth	Micraline	Luxline	Smooth	Micraline	Luxline	Smooth	Micraline	Luxline	Golden Oak

Only available with MagnaFlow™ top skin

^ Additional LM charge applies MagnaFlow & Timber Effect, refer pricelist.

### 5. Panel Quantities:

Quantity	@	Top Skin Length Min - 1500mm Max - 10000mm	Standard Configuration (viewed from gutter end): 60mm Gutter Cutback (Front only) / Right side Lap (Tick to select) <input checked="" type="checkbox"/>			Cover Width
			Alternatively, please nominate custom configuration below:			
			Gutter Cutback (Front) Specify Size (mm)	Cutback (Rear) Specify Size (mm)	Lap (Right or Left)	
	@				1000mm	
	@				1000mm	
	@				1000mm	
	@				1000mm	
	@				1000mm	
	@				1000mm	
	@				1000mm	

### 1. Flashings

Type	Roof Pitch	Style (please circle)	Colour	Qty.	Length (Max. 8m)	Qty.	Length (Max. 8m)
 Receiver Channel <i>(Please Specify Pitch)</i>		Stepped / Flush	White				
 Top End Capping <i>(Please Specify Pitch)</i>		Stepped / Crush Fold					
 Side Barge Capping	N/A	Crush Fold					
 Z Gutter Fascia <i>(Please Specify Pitch)</i>		Stepped / Crush Fold					
 Ridge Capping <i>(Please Specify Pitch)</i>		N/A					
 Apron Flashing <i>(Please Specify Pitch)</i>		N/A					
Fire Flashing - Roof End x 1000mm (1 x req. per panel)			White				
Fire Flashing - Gutter End x 1000mm (1 x req. per panel)			White				

### 2. Gutter

Type	Colour	Qty.	Length
<b>Square Gutter</b>	Slotted Square Gutter <i>(Max. 8m)</i>		
	Square Gutter Stop Ends (Pair)		
	Square Gutter Brackets		
	Slotted Quad Gutter 125 <i>(Max. 8m)</i>		
<b>Quad Gutter</b>	Quad Gutter Stop Ends (Pair)		
	Quad Gutter External Brackets		
	Quad Gutter Internal Brackets	Galvanised	
	Quad Gutter External Corners		45 / 90° (Circle)
	Quad Gutter Internal Corners	Galvanised	45 / 90° (Circle)

### 4. Screws

Length	Finish	Qty.	Painted Boxes	Colour (Boxes only)	Qty.
<b>Metal Fix</b>	110mm	Galv.		Min-100	
	125mm	Galv.		Min -100	
	150mm	Galv.		Min -100	
	175mm	Galv.		Min -100	
	205mm	Galv.		Min -100	
	230mm	Galv.		Min -100	
	250mm	Galv.		Min -100	
<b>Timber Fix</b>	125mm	Galv.		Min -100	
	150mm	Galv.		Min -100	
	175mm	Galv.		Min -100	
	200mm	Galv.		Min -100	
	225mm	Galv.		Min -100	
	250mm	Galv.		Min -100	
Type				Colour	Qty.
Stitching Screws Painted 16mm (100pk)					
Rivets Painted (100pk) 3.2mm dia. x 9.5mm grip					

### 3. Downpipes

Type	Colour	Qty.
<b>Rectangle</b>	Downpipe 2.4m - 100 x 50 Rect.	
	Downpipe Outlet - 100 x 50 Rect.	Galvanised
	Downpipe Straps - 100 x 50 Rect.	
	82° Offset - 100 x 50 Rect.	
<b>Round</b>	Downpipe 2.4m - 90mm Round	
	Downpipe Outlet - 90mm Round	Galvanised
	Downpipe Straps - 90mm Round	
	45° Bend - 90mm Round	

### 5. Accessories

Type	Details	Qty.
LED Downlight White Bezel, Dimmable	Multi: 3000/4000/5000k (Adjustable: Warm, Neutral, Cool)	
LED Downlight Brushed Aluminium Bezel, Dimmable	<i>(please circle)</i> Warm White (3000k) Cool White (5000k)	
Downlight Dimmer	Specialist LED	
Roof Infill Strip	Spacemaker x 1000mm	
Roof Infill Strip	Corrolink-S x 1000mm	
Roof Infill Strip	Versalink 1000 x 1000mm	
Eave / Ridge Filler Strip	Corrolink 915mm	
Eave Filler Strip	Versalink 765mm	
Ridge Filler Strip	Versalink 765mm	
Fan Fixing Plate <i>(inc. locking nut)</i>	White - 100mm Diameter	
Fan Fixing Plate Screws	1 x Profile Fix & 1 x Pan Fix	
Purlin Tape	5mm x 40mm - 13m Roll	
Butyl Tape	12mm x 15m Roll	
Touch Up Paint	Pearl White Spray Can 150gm	

**1. Skylight Kit Combinations (Includes materials to install 1 x skylight per kit)**

Type	Details	Qty.
Spacemaker/Versalink 1000: 4m Kit	Top Fibreglass Strip   Twinwall Bottom Diffuser Strip   2 x 4000mm T-Bars Foam Infill Pair   Stormtite Stitching Screws   Rivets   Twinwall Sealer Tape	
Spacemaker/Versalink 1000: 6m Kit	Top Fibreglass Strip   Twinwall Bottom Diffuser Strip   2 x 6000mm T-Bars Foam Infill Pair   Stormtite Stitching Screws   Rivets   Twinwall Sealer Tape	
Spacemaker/Versalink 1000: 8m Kit	Top Fibreglass Strip   Twinwall Bottom Diffuser Strip   4 x 4000mm T-Bars Foam Infill Pair   Stormtite Stitching Screws   Rivets   Twinwall Sealer Tape	
Corrolink-S: 4m Kit	Top Fibreglass Strip   Twinwall Bottom Diffuser Strip   2 x 4000mm T-Bars Foam Infill Strip   Stormtite Stitching Screws   Rivets   Twinwall Sealer Tape	
Corrolink-S: 6m Kit	Top Fibreglass Strip   Twinwall Bottom Diffuser Strip   2 x 6000mm T-Bars Foam Infill Strip   Stormtite Stitching Screws   Rivets   Twinwall Sealer Tape	
Corrolink-S: 8m Kit	Top Fibreglass Strip   Twinwall Bottom Diffuser Strip   4 x 4000mm T-Bars Foam Infill Strip   Stormtite Stitching Screws   Rivets   Twinwall Sealer Tape	

Alternatively, you can order items required individually below:

**2. Fibreglass Top & Twinwall Bottom**

Type	Length	Qty.	Cut to Length (please specify length req.)
Spacemaker/ Versalink 1000 Top Fibreglass Strip	4m*		
	6m*		
	8m*		
Corrolink-S Top Fibreglass Strip	4m*		
	6m*		
	8m*		
Twinwall Diffuser Bottom Strip	4m*		
	6m*		
	8m*		

\*Please note: you will be purchasing full lengths. We will cut these to your required lengths and you will be provided with any offcuts.

**3. Accessories**

Type	Qty.	Type	Qty.
Spacemaker/Versalink 1000 Foam Infill Pair		Twinwall Sealer Tape (50m Roll)	
Corrolink-S Foam Infill (915mm Strip 1/Skylight)		Stitching Screws - 50 pack Surfmist Storm-Tite 25mm	
Rivets, White - 100 pack 3.2mm dia x 9.5mm		Silicone: Clear/White (Please Circle)	
Aluminium T-Bar   <b>4m</b> White - 40 x 50mm		Aluminium T-Bar   <b>6m</b> White - 40 x 50mm	
<b>Spacemaker/Versalink 1000 Accessory Bag:</b> Foam Infill Pair   35 x Stormtite Stitching Screws   60 x Rivets   1m Twinwall Sealer Tape			
<b>Corrolink-S Accessory Bag:</b> Foam Infill Strip   35 x Stormtite Stitching Screws   60 x Rivets   1m Twinwall Sealer Tape			

**What you need:**

- Fibreglass profiled top strip (4m, 6m & 8m only) - cut to match overall top sheet length, if required
- Twin wall bottom diffuser ceiling strip (4m, 6m & 8m only) - cut to match ceiling length, if required
- T-bar aluminium extrusions (4m & 6m only) - require 2 x T-Bars per light strip, either side of bottom diffuser strip
- Twin wall seal tape - require 460mm for each Skylight
- Foam infills (Spacemaker = 2 piece set per skylight, Corrolink-S = 1 piece per skylight, cut to size onsite)
- Stormtite Screws - fixed through profile/crest at 600mm centres, along both sides of the fibreglass profiled top strip
- Blind Rivets - fixed through T-Bar at 300mm centres
- Silicone - run bead of silicone along top of horizontal section of T-Bar prior to pressing Twinwall into place and along Z Flashing prior to pressing foam infill into place

**Please request and review engineering specifications prior to ordering skylights**

# Site Delivery Instruction Form

Date: / /	Order No.:	Job Name:
Company Name:		ABN:
Order Contact Name:		Order Contact Phone:
Order Contact Email:		Date order required:
Invoice Address:	State:	Post Code:
Delivery Address:	State:	Post Code:
Site Contact:		Site Contact Phone:

1. Site is:	Residential <input type="checkbox"/>	Commercial <input type="checkbox"/>	Rural <input type="checkbox"/>	
2. Delivery Surface is:	Grass <input type="checkbox"/>	Dirt <input type="checkbox"/>	Bitumen <input type="checkbox"/>	Gravel <input type="checkbox"/>
3. Does rain affect access to property:	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
4. Does peak hour traffic affect delivery:	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
5. Is the site affected by Clearways (no stopping or no standing)	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
6. Does the site have semi trailer access:	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
7. Is a HI-AB required	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
8. Is anything preventing a truck stopping outside:	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
9. Is the driveway accessible for for a truck:	Yes <input type="checkbox"/>	No <input type="checkbox"/>		


**Please note, some deliveies may be done with a semi trailer which at a minimum will be 16m long and 2.6m wide and weigh up to 30 tonnes Gross**

10. Is the site affected by overhead lines/trees:	Yes <input type="checkbox"/>	No <input type="checkbox"/>
---	------------------------------	-----------------------------

Special Instructions:

## State-legislated safe zones distances for over head lines and cables (up to 132kV)

State	No-Go Zone	Spotter Required	Safe Zone
NSW	0-1.8m	1.8-3.0m	3.0m or more
VIC	0-3.0m	3.0m-6.4m	6.4m or more
QLD	0-3.0m	3.0m or more	
SA	0-3.0m	3.0-6.4m	6.4m or more

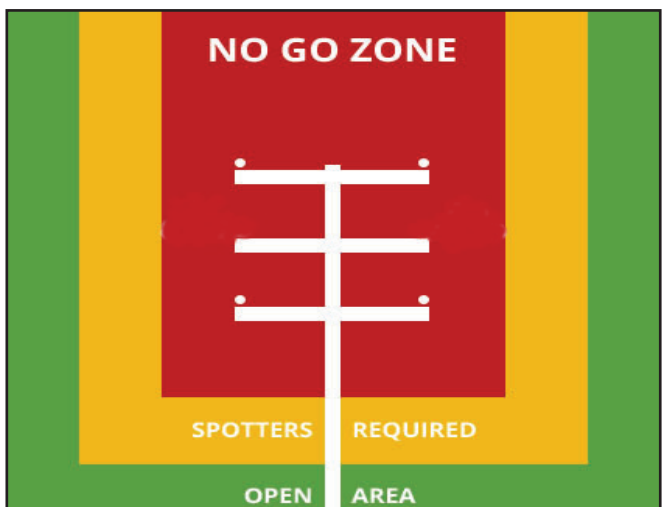

**Unloading**  
 Our deliveries are undertaken in accordance with local council or site requirements. Our driver is responsible for unloading the delivery if it can be:

- handled by the driver alone, or
- craned off to ground level using a truck mounted crane.