

Versalink 1000

The ideal solution for modern homes, Versalink features a trapezoidal shape with an additional ridge that gives it a contemporary edge. With a minimum roof pitch of just 1 degree and the ability to customise overlap and gutter cutbacks, it provides ultimate installation flexibility.



Intelligently engineered

- Minimum roof pitch of only 1° for maximum headspace
- Unsupported span of up to 10m reduces the need for unsightly support beams and makes for easy cleaning
- Ability to accessorise with downlights, ceiling fans and skylight strips for a customised and comfortable outdoor space

Simple and flexible installation


- Lightweight, self-mating 1000mm wide panels for fast and efficient installation with less visible ceiling joins
- Gutter cutback width and lap direction can be customised to suit installation requirements
- Integrated service channel both through the core and between panel joins for electrical wiring

Excellent thermal performance

- Thermal performance of R_t3.5 dramatically reduces heat transfer during summer and mould and condensation during winter


Quality assured and peace of mind

- Made in Australia for Australian conditions
- Suitable for use in coastal regions with optional UniCote Coastal™ pre-painted steel
- Bushfire rated - suitable for use in bush fire zones up to BAL-40

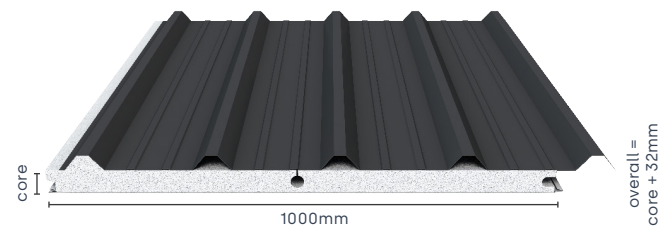

Versalink 1000

Product Specifications

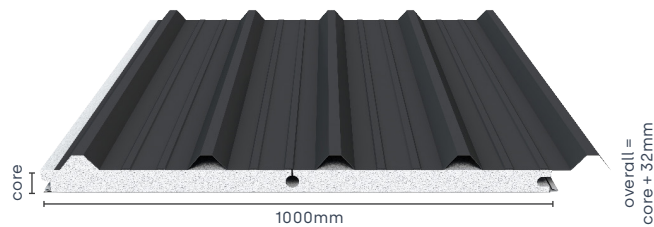

| Versalink Span Table | | | | |
|---|---|---------------------|---------------|-----------------------|
| Wind Class in accordance with AS4055.20 | Panel Size | Maximum Single Span | | |
| | | Fully Enclosed Room | One Side Open | Two/ Three Sides Open |
| N1 (W28N) | 50mm | 6893 | 6398 | 6893 |
| | 75mm | 8644 | 7794 | 8644 |
| | 100mm | 8726 | 7989 | 8726 |
| | 125mm | 9791 | 8828 | 9791 |
| | 150mm | 10000 (10568*) | 9610 | 10000 (10568*) |
| N2 (W33N) | 50mm | 6108 | 5539 | 6108 |
| | 75mm | 7195 | 6524 | 7195 |
| | 100mm | 7375 | 6687 | 7375 |
| | 125mm | 8149 | 7390 | 8149 |
| | 150mm | 8871 | 8044 | 8871 |
| N3 (W41N) | 50mm | 4807 | 4368 | 4807 |
| | 75mm | 5663 | 5145 | 5663 |
| | 100mm | 5804 | 5273 | 5804 |
| | 125mm | 6414 | 5827 | 6414 |
| | 150mm | 6982 | 6343 | 6982 |
| Other wind classes | N4 (W50N) - C1 (W41C) - C2 (W50C) - C3 (W60C). Span table for other regions available at www.versiclad.com.au/spans . | | | |

In accordance with Wind actions: AS/NZS 1170.2 - Clause 5.3, 5.4 and D4;
 Imposed load on roof: AS/NZS 1170.1 - Clause 3.5
 *Maximum manufactured ceiling length = 10000mm.
 Maximum engineered spans used for cantilever lengths; cantilever ability of the panel is 25% of the maximum allowable span, provided there is double the desired cantilever as a backspan.
 Maximum side eave achievable is 450mm, based on using a full width panel.
 Fixing Details: Fixed to support member with 14g self drilling screws at every crest.
 Typically 4 screws to each panel, at each support. Request engineering specs for more information.

| Versalink Specifications | | | | | |
|--------------------------|-------------------|-----------------------------|----------------------------|-----------------------|-----------------------|
| Core Thickness | Overall Thickness | Weight (kg/m ²) | *Declared material R-Value | R _T Winter | R _T Summer |
| 50mm | 82mm | 9.74 | 1.15 | 1.35 | 1.33 |
| 75mm | 107mm | 10.14 | 1.75 | 1.96 | 1.91 |
| 100mm | 132mm | 10.54 | 2.35 | 2.57 | 2.49 |
| 125mm | 157mm | 10.94 | 2.95 | 3.19 | 3.07 |
| 150mm | 182mm | 11.34 | 3.50 | 3.8 | 3.65 |


The Declared R-Value is at 23° In accordance with AS/NZS 4859.1 and AS/NZS 4859.2

Roof Colour Range (Upper skin 0.42mm G550 Steel)




* Equivalent colour names are trademarks of BlueScope Steel Limited and used only for comparison. Colour swatches are provided as an indication of colour only and may not be an actual representation of colour. We recommend checking your chosen colour against an actual sample of the product before purchasing.
 ^ Minimum order quantity of 50 linear metres or set up fee applies for selected colours.
 > Dark Colour. Refer to Roof and Wall Warranty clause 5 – Dark colours and heat exposure.

UniCote Coastal™ Corrosion Resistant Top and Ceiling Options

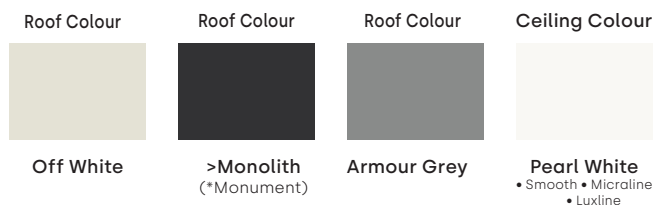

Additional linear metre fees apply for UniCote Coastal™ colours.
 Only available in UniCote Coastal™ top skin/ceiling skin combinations as shown above.

Ceiling Colour and Finish Options (Lower skin 0.5mm G300 Steel)

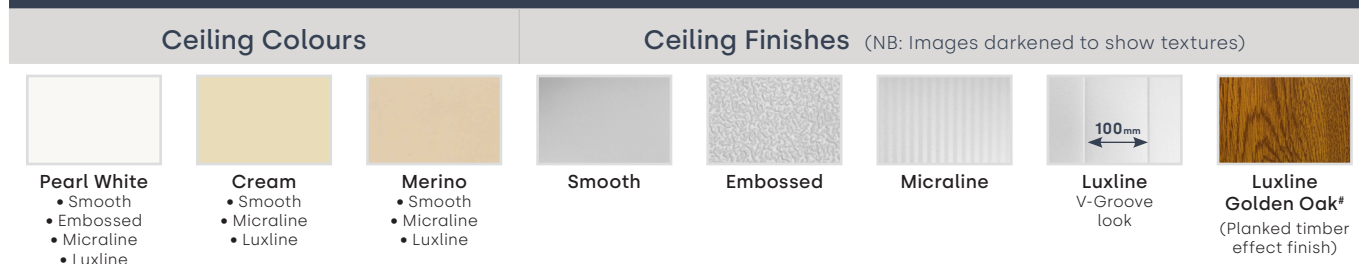

ALL finishes are for illustration purposes only. For true representation please request a colour swatch.
 #Additional linear metre fees apply for woodgrain timber effect finishes.